
DS-7108NI-E1/V/W

WiFi Router NVR




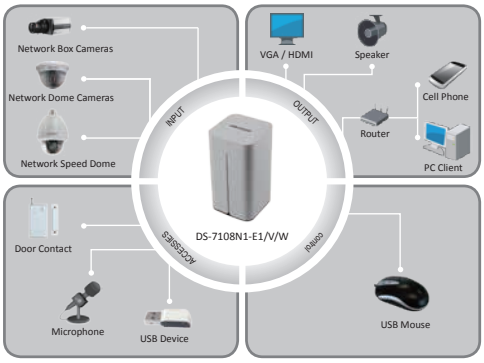

Key features

- Automatic detection and connection of IP cameras without any manual operation
- Up to 6 Megapixels resolution recording
- HDMI output at up to 1920×1080P resolution
- Access to EZVIZ Cloud for remote live view, playback and configuration
- Support WPS (WIFI Protected Setup) feature.
- Built-in silent fan with automatic speed adjustment.
- 802.11 b/g/n and a built-in dual WIFI antenna for a strong wireless network signal

Rear Panel of DS-7108NI-E1/V/W

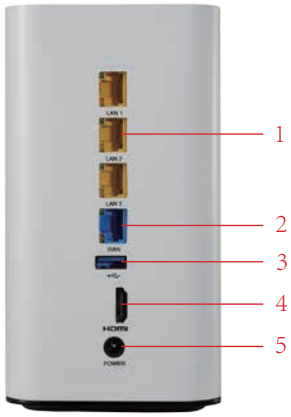

1. LAN Interface (1 ~ 3)
2. WAN Interface
3. USB Interface
4. HDMI
5. POWER

Available models

DS-7108NI-E1/V/W

	DS-7108NI-E1/V/W
Video/Audio input	
IP video Input	8-ch
Video Compression	H.264, MPEG4
Protocol	HIKVISION, ACTi, ARECONT, AXIS, BOSCH, BRICKCOM, CANON, HUNT, ONVIF (version 2.4), PANASONIC, PELCO, PSIA, RTSP, SAMSUNG, SANYO, SONY, VIVOTEK ,ZAVIO
Network	
Incoming Bandwidth	50Mbps
Outgoing Bandwidth	80Mbps
Protocol	IPv6, UpnP, SNMP, NTP, SADP, DDNS, SMTP, NFS, iSCSI.
Video/Audio Output	
Recording Resolution	6MP/5MP/3MP/1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF
HDMI Output (with audio output)	1-ch, resolution: 1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Playback Resolution	6MP/5MP/3MP/1080P /UXGA /720P /VGA /4CIF /DCIF /2CIF /CIF /QCIF
Synchronous Playback	8-ch
Record	
Record Type	Manual, Continuous, Motion Detection, Alarm, Motion Detection & Alarm, Motion Detection | Alarm, VCA.
Playback Type	Instant Playback, Normal Playback, Event Playback, Tag Playback, Log Playback, Smart Playback, External file Playback.
Backup Mode	Normal, Event
Hard disk	
SATA	12V DC
Capacity	2.5-inch, 500G / 1T
External Interface	
Network Interface	1 RJ-45 10 /100 Mbps WAN interface; 3 RJ-45 10 / 100M LAN interfaces.
USB Interface	1 × USB 3.0
Wireless	
Frequency Band	2.4GHz
Antenna Structure	2 × 2MIMO
Transmission Rate	300Mbps
Transmission Standard	IEEE 802.1b/g/n
Others	
Power Supply	12VDC
Consumption	≤ 12 W
Working Temperature	0 ºC ~ +40 ºC (+32 ºF ~ +104 ºF)
Working Humidity	10 % ~ 90 %
Dimensions(W × D × H)	87 × 87 × 157 mm (3.4 × 3.4 × 6.2 inch)
Weight	≤ 0.53 Kg (1.2lb)